

## UTILITY TRUCK BODY SPECS

Vehicle will be a 56" cab to axle single rear wheel truck

Body shall be zinc coated steel welded construction 96" long. Body designed with 6 compartments, 2 vertical and 1 horizontal with built in continuous drip rails.

Compartment depth shall be minimum of 21" deep. Minimum bed width of 37".

36

All shelves shall have a minimum 1" front hemmed lip.

Front vertical on both sides to be approximately 42" tall 32" wide with 2 adjustable shelves.

Horizontal compartment on both sides to be 42" long, 20" tall with a fixed shelf with adjustable dividers.

Rear vertical compartment on both sides to be 42" tall; 22" wide and have 1 adjustable shelf.

Body must be interlaced underbody design for lowest possible center of gravity, maximum strength and unitized body construction. Standard body design will incorporate a minimum of 8 cross members and 2 full length longitudinal support channels.

Compartment tops have 3 die formed ribs on each side longitudinally for rigidity and reinforcement without increasing body weight.

Body has full width rear structural crossmember tied to 1/8" diamond plate floor with 1" return flange on each side.

14 ga electro galvanized steel double paneled tail gate with die formed strengthener. 12" high work bench tailgate with supports and gravity locking device requiring no chains, cables or levers to function properly.

All doors are constructed of 16 ga outer and 20 ga inner electro galvanized steel. Doors are double panel with hat section reinforcements and have U shaped notch to keep water and dust from the inner compartment and hemmed for safety.

Bed of floor to be 1/8" diamondplate with a 1" upward flange.

All hinges are 5/16" stainless steel rod construction with nylon inserts.

Body is equipped with slam action latches, welded into the door and designed to allow repair or replacement without the removal of the latch bezel. All latches come with 10 year warranty.

Compartment interiors are painted using high quality automotive grade enamel silver hammertone for maximum reflective quality. Primers are not allowed.

The entire underside of the body is undercoated with automotive grade undercoating material 6 mils thick.

FMVSS 108 safety lighting. All lights are recessed and protected by a wire retention system built in at time of manufacture.

Body has 5 year no rust through, 5 year hinge warranty and 10 year unconditional warranty on the slam action latches and 1 year warranty on all other components.





UTILITY TRUCK BODIES, INC. • "BUILT TO WORK...BUILT TO LAST!"

1530 Wood Street • Oakland, CA 94607 • 510-271-0797 • Fax: 510-271-8038

## SERIES S-96

QUALITY ENGINEERED

MODEL DESIGNATION	STANDARD HEIGHT	STANDARD HEIGHT LOWER REAR DRS.	LOW SILHOUETTE	LOW SILHOUETTE LOWER REAR DRS.
	SX96	S96 S96LV S96VL	SLX96	SL96 SL96LV SL96VL
CAB TO AXLE (CA)	56"	56"	56"	56"
BODY LENGTH (A)	96"	96"	96"	96"
BODY HEIGHT (B)	42"	42"	36"	36"
COMPARTMENT DEPTH (C)	14 <sup>3</sup> / <sub>4</sub> " 18"	14 <sup>3</sup> / <sub>4</sub> " 18"	14 <sup>3</sup> / <sub>4</sub> " 18"	14 <sup>3</sup> / <sub>4</sub> " 18"
BED WIDTH (D)	49" 42"	49" 42"	49" 42"	49" 42"
FLIP TOPS (OPTIONAL)	ADD "FT" AFTER MODEL DESIGNATION / 4 <sup>1</sup> / <sub>4</sub> " DEEP STD.			
FRONT COMPT. LENGTH (F)	32"	32"	32"	32"
HORIZ. COMPT. LENGTH (G)	42"	64"	42"	64"
HORIZ. COMPT. SHELF LOCAT. (H)	8"	8"	6"	6"
REAR COMPT. LENGTH (I)	22"	22"	22"	22"
HORIZ. COMPT. HEIGHT (J)	20"	20"	17"	17"
FLOOR TO COMPT. TOP (K)	29 <sup>3</sup> / <sub>4</sub> "	29 <sup>3</sup> / <sub>4</sub> "	23 <sup>3</sup> / <sub>4</sub> "	23 <sup>3</sup> / <sub>4</sub> "
OVERALL BODY WIDTH (L)	78 <sup>1</sup> / <sub>2</sub> "	78 <sup>1</sup> / <sub>2</sub> "	78 <sup>1</sup> / <sub>2</sub> "	78 <sup>1</sup> / <sub>2</sub> "
CLEAR DOOR OPENINGS	L X H	L X H	L X H	L X H
FRONT COMPARTMENT	28" X 34 <sup>1</sup> / <sub>2</sub> "	28" X 34 <sup>1</sup> / <sub>2</sub> "	28" X 28 <sup>1</sup> / <sub>2</sub> "	28" X 28 <sup>1</sup> / <sub>2</sub> "
HORIZ. COMPARTMENT	35 <sup>1</sup> / <sub>2</sub> " X 15 <sup>1</sup> / <sub>4</sub> "	58" X 15 <sup>1</sup> / <sub>4</sub> "	35 <sup>1</sup> / <sub>2</sub> " X 12 <sup>1</sup> / <sub>4</sub> "	58" X 12 <sup>1</sup> / <sub>4</sub> "
REAR COMPARTMENT	18" X 34 <sup>1</sup> / <sub>2</sub> "	18" X 15"	18" X 28 <sup>1</sup> / <sub>2</sub> "	18" X 12"

### STANDARD COMPARTMENT INTERIORS


#### LEFT SIDE:

FRONT VERTICALS .....2-ADJUSTABLE TRAYS  
HORIZONTAL.....1-PLAIN FIXED SHELF  
REAR VERTICAL .....1-ADJUSTABLE TRAY



#### RIGHT SIDE:

FRONT VERTICALS .....2-ADJUSTABLE TRAYS  
HORIZONTAL  
(STANDARD).....1-FIXED SHELF WITH  
ADJUSTABLE DIVIDERS  
(FLIP TOP).....1-PLAIN FIXED SHELF  
REAR VERTICAL .....1-ADJUSTABLE TRAY

To insure long lasting durability...

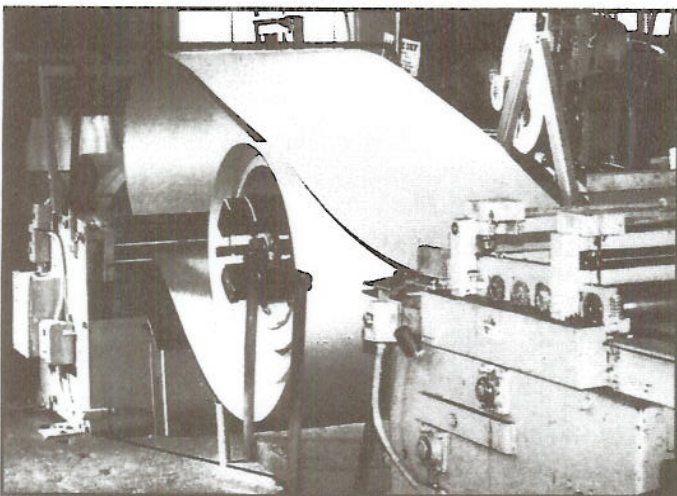


All UTB bodies start here...

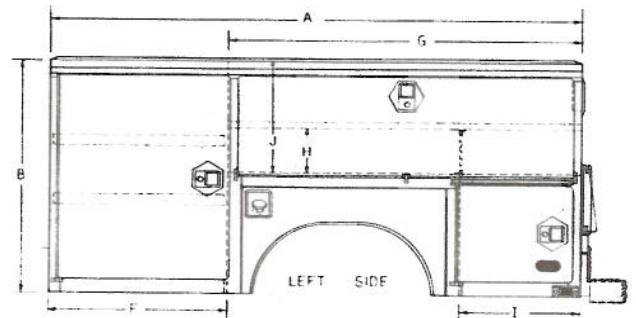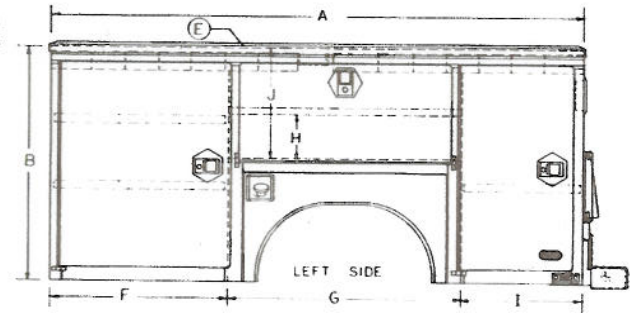

### MODEL DESIGNATION - LOWER REAR DOOR (OPTIONAL)

FULL HEIGHT      LOW SILHOUETTE  
BOTH SIDES .....S96 .....SL96  
LEFT SIDE .....S96LV .....SL96LV  
RIGHT SIDE .....S96VL .....SL96VL

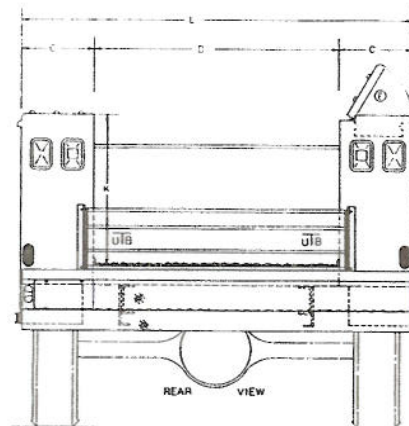

STANDARD:  
CLOSED TOP

OPTIONAL:  
FLIP TOP

We invite you to visit UTB  
or one of our distributors  
to discuss your utility or  
field mechanic body  
requirements...

we can get you on the  
road...

doing business in a truck  
body that works!

DISTRIBUTOR:

75 lbs  
heavier





37" bed width

UTILITY TRUCK BODIES, INC. • "BUILT TO WORK...BUILT TO LAST!"

1530 Wood Street • Oakland, CA 94607 • 510-271-0797 • Fax: 510-271-8038

## SERIES S-108

QUALITY ENGINEERED

MODEL DESIGNATION		STANDARD HEIGHT	STANDARD HEIGHT LOWER REAR DRS.	LOW SILHOUETTE	LOW SILHOUETTE LOWER REAR DRS.
		SX108	S108 S108LV S108VL	SLX108	SL108 SL108LV SL108VL
CAB TO AXLE (CA)		60"	60"	60"	60"
BODY LENGTH	(A)	108"	108"	108"	108"
BODY HEIGHT	(B)	42"	42"	36"	36"
COMPARTMENT DEPTH	(C)	18"	21"	18"	21"
BED WIDTH	(D)	56"	50"	56"	50"
FLIP TOPS (OPTIONAL)	(E)	ADD "FT" AFTER MODEL DESIGNATION			
FRONT COMPT. LENGTH	(F)	32"	32"	32"	32"
HORIZ. COMPT. LENGTH	(G)	54"	76"	54"	76"
HORIZ. COMPT. SHELF LOCAT.	(H)	8"	8"	6"	6"
REAR COMPT. LENGTH	(I)	22"	22"	22"	22"
HORIZ. COMPT. HEIGHT	(J)	20"	20"	17"	17"
FLOOR TO COMPT. TOP	(K)	29 <sup>3</sup> / <sub>4</sub> "	29 <sup>3</sup> / <sub>4</sub> "	23 <sup>3</sup> / <sub>4</sub> "	23 <sup>3</sup> / <sub>4</sub> "
OVERALL BODY WIDTH	(L)	92"	92"	92"	92"
CLEAR DOOR OPENINGS		L X H	L X H	L X H	L X H
FRONT COMPARTMENT		28" X 34 <sup>1</sup> / <sub>2</sub> "	28" X 34 <sup>1</sup> / <sub>2</sub> "	28" X 28 <sup>1</sup> / <sub>2</sub> "	28" X 28 <sup>1</sup> / <sub>2</sub> "
HORIZ. COMPARTMENT		47 <sup>1</sup> / <sub>2</sub> " X 15 <sup>1</sup> / <sub>4</sub> "	32 <sup>3</sup> / <sub>4</sub> " X 15 <sup>1</sup> / <sub>4</sub> "	47 <sup>1</sup> / <sub>2</sub> " X 12 <sup>1</sup> / <sub>4</sub> "	32 <sup>3</sup> / <sub>4</sub> " X 12 <sup>1</sup> / <sub>4</sub> "
REAR COMPARTMENT		18" X 34 <sup>1</sup> / <sub>2</sub> "	18" X 15"	18" X 28 <sup>1</sup> / <sub>2</sub> "	18" X 12"

NOTE: • MOST SERIES S-108 BODIES INCORPORATE SPECIAL CUSTOMER-REQUESTED OPTIONS OR FEATURES TO ACCOMMODATE SPECIFIC EQUIPMENT OR JOB APPLICATIONS (AS SHOWN IN PHOTOS).  
• REGARDING (F) ABOVE: OPTIONAL 36" COMPARTMENT LENGTH AVAILABLE WITH DOUBLE BARN DOORS ON FORD SUPER DUTY OR CHEVY / GMC C3500 HD (15,000 GVW) ONLY.

## STANDARD COMPARTMENT INTERIORS




### LEFT SIDE:

FRONT VERTICAL.....2-ADJUSTABLE TRAYS  
HORIZONTAL.....1-PLAIN FIXED SHELF  
REAR VERTICAL.....1-ADJUSTABLE TRAY

### RIGHT SIDE:

FRONT VERTICAL.....2-ADJUSTABLE TRAYS  
HORIZ. (STANDARD)...1-FIXED SHELF W/ ADJUST. DIVIDERS  
(FLIP TOP).....1-PLAIN FIXED SHELF  
REAR VERTICAL.....1-ADJUSTABLE TRAY

REAR BUMPER IS OPTIONAL (SEE OPTION SHEET)

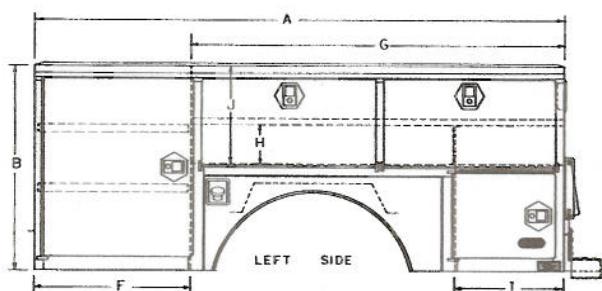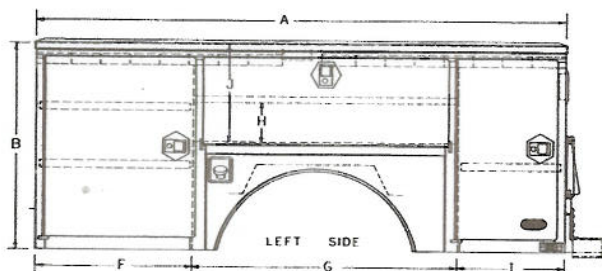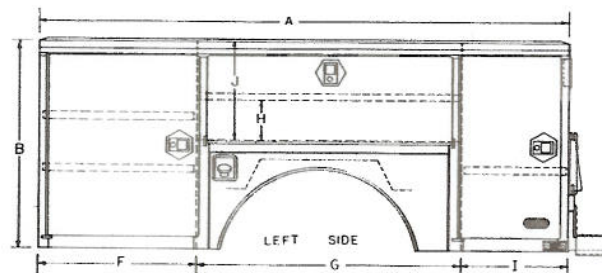


## MODEL DESIGNATION - LOWER REAR DOOR


FULL HEIGHT LOW SILHOUETTE  
BOTH SIDES.....S108.....SL108  
LEFT SIDE.....S108LV.....SL108LV  
RIGHT SIDE.....S108VL.....SL108VL

## DISTRIBUTOR:

DRAKE TRUCK & TRAILER  
2235 S 18TH AVE  
PHOENIX AZ 85009  
602-278-2552  
800-372-5324

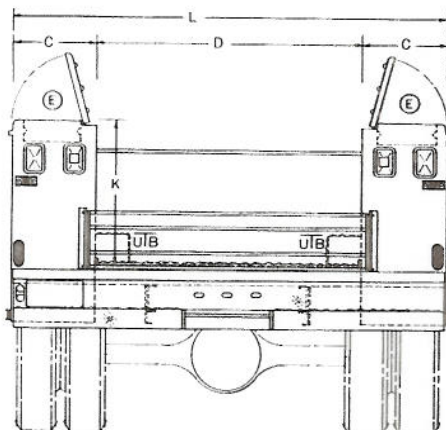

FLIP TOPS OPTIONAL

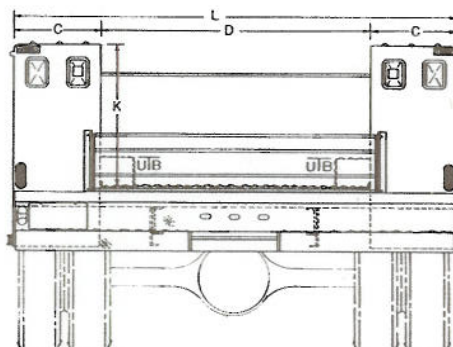

CLOSED TOPS STANDARD